


Decoupling tape EB

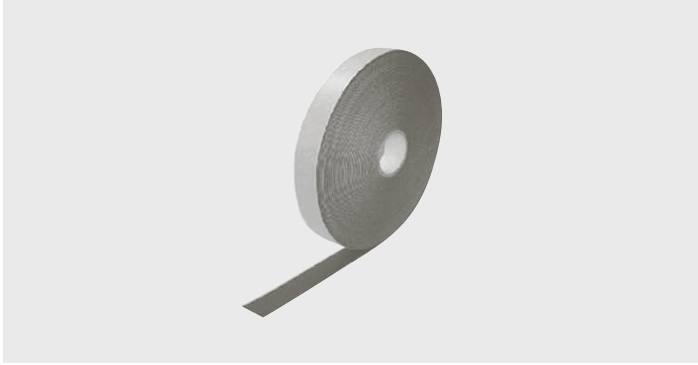

Technical characteristics

Building material class DIN 4102	B2 (normal flammable)
Thermal conductivity EN ISO 12572	0.042 W/m x K
Temperature resistance	-30 °C up to +80 °C
Building material compatibility DIN 18542	passed
Storage temperature	+1 °C up to +20 °C
Storage time	1 years
Processing temperature	>5 °C

Description


Decoupling tape made of closed-cell polypropylene foam (PP)
 One-sided self-adhesive
 Suitable for thermal separation of construction components

Application

Thermal separation between profile sheets and metal profiles
 Thermal separation between profile sheets and liner trays

Features and Benefits

- Dimensional stable, compression resistant
- Thermal insulation properties
- Ageing resistance
- Environmentally friendly – chemically neutral



Decoupling tape EB

Product code	PU	Tape wide (mm)	Joint wide (mm)	Roll length (m)	
EB-30×3-SK	1	30	3	30	1163565
EB-40×3-SK		40			1163566
EB-50×3-SK		50			1163567
EB-60×3-SK		60			1163568
EB-80×3-SK		80			1163570
EB-90×3-SK		90			1385482